

ZIP CLIPS



Zip Clip RIZE


Quickly secures your wire ropes, even down to 1 mm wire! Produce your own made to measure wire suspension pieces. Extremely quick and easy installation, simply pass one end of the wire through the Zip Clip RIZE in the direction of the arrow shown, then through your fixing point. Then pass back at least 150 mm of the wire through the Zip Clip RIZE. Push the pins in the opposite direction to the arrows to secure. The 4 mm is able to connect to a fixing point and the suspension with just one Zip Clip RIZE, thanks to its double grip feature.



These clips are not suitable for use with dynamic loads, but we think they are particularly well suited for:

- ✓ Display work
- ✓ Temporary fixings to ease height placement thanks to easy adjustment
- ✓ Where the exact requirements / fixing point cannot be established in advance of arrival on-site
- ✓ Secondary lightweight supports

SPECIFICATION: The SWL has been calculated with a Safety Factor of 5:1.

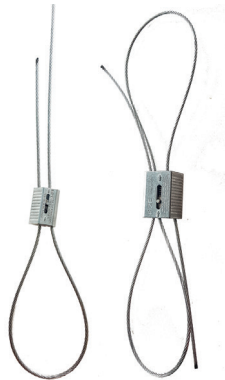

Only the 4mm can achieve this!

code	size	SWL 5:1	price	10+
WIRZIPKL050	1mm	15kg	£2.05	£1.83
WIRZIPKL100	2mm	50kg	£2.33	£2.09
WIRZIPKL150	3mm	120kg	£3.38	£3.03
WIRZIPKL200	4mm	300kg	£6.98	£6.25

Zip Clip Wire

Zip Clips must be used with Zip Clip steel wire to meet its guarantee. 1 mm and 2 mm wires come in a very handy dispenser box. See from page 185 for our full range of wire rope.



code	Construction	length	size	MBL	price
WIRZIPR200G	7 x 7	200mm	1mm	78kg	£48.28
WIRZIPR100S	7 x 7	100mm	2mm	290kg	£29.61
WIRZIPR100Y	7 x 7	100mm	3mm	645kg	£47.36
WIRZIPR100P	7 x 19	100mm	4mm	2804kg	£69.99

Zip Clip STRUT-LOCK

Similar to the Reutlinger concept but much smaller. Strut-Lock is a safe, lockable solution for installing single and multi-tiered static loads that are supported vertically. When installed as part of a wire suspension system, the steel device delivers an impressive safety factor of 5:1, with weight loading of 45 kg per wire. Can be used for wrapping around existing steelwork. Ideal for long and varied suspension lengths and for secondary light supports. For use with 2 mm wire listed to the left. Quick to install and easy to adjust to desired height. Once the STRUT-LOCK is located in place with square washer and channel nut on the M8 thread, tighten into position using 15 mm spanner. Unscrew locking collar [not fully]. Depress plunger, insert wire rope through the top of the device and tighten locking collar to lock. The STRUT-LOCK is versatile and is not just for use with unistrut as pictured.



depress plunger



insert wire rope



tighten collar to lock

code	SWL 5:1	price	10+
WIRZIPSLM8	45kg	£5.34	£4.68