

# ACCESS EQUIPMENT

## ZARGES 3-PART SKYMASTERS



### Zarges Trade 3-Part Skymasters

The Zarges Trade Skymaster Ladder is the standard type of ladder for performance venues. It is immensely versatile, you can use it as a three-part extension ladder, stepladder, free-standing two-part extension ladder or stairway trestle, etc. It's ideal for getting to studio grids, awkward lighting positions, over seating, up the back of scenery etc. It's also a great tool for the maintenance engineer, for corridor and stairwell lighting, difficult to reach windows and plants.

The Skymaster comes in seven sizes: 6, 7, 8, 9, 10, 12 and 14 rung three-part ladders. The 8, 10, 12, and 14 rung ladders are available as industrial versions on our website – see flints.co.uk. The Industrial type are fitted with twin locking bars and wheels on the top section. Each ladder comes with a stabiliser bar and one locking bar to lock the ladder in the closed position for ease of transportation. Flint's prices are well below list price. See the next page for accessories, including raked stage adapters.

Conformity: EN 131 approved to 150 kg. Delivery prices: UK mainland £15.00 [3 day] £25.00 [next day].

\* = also available as Industrial version - see our website for more details



### Zarges Trade Skymaster Sizes and Prices

Model no:	41536	41537	41538	41539	41540	41542	41544
Rungs per section	6	7	8	9	10	12	14
Closed length	1.90m	2.20m	2.40m	2.70m	3.00m	3.60m	4.10m
2-part extension length	3.00m	3.60m	4.10m	4.70m	4.96m	6.10m	6.90m
3-part extension length	4.10m	5.00m	5.80m	6.70m	6.90m	8.60m	9.70m
Stabiliser bar width	0.80m	0.89m	1.00m	1.09m	1.09m	1.20m	1.20m
Stile dimension	68 x 25mm	68 x 75mm	73 x 25mm	73 x 25mm	73 x 25mm	98 x 25mm	98 x 25mm
Weight	13.8kg	15.0kg	17.5kg	20.0kg	23.3kg	28.8kg	36.4kg

code	description	price
ZAR41536	6 rung	£369.54
ZAR41537	7 rung	£397.62
ZAR41538	8 rung*	£385.10
ZAR41539	9 rung	£399.62
ZAR41540	10 rung*	£462.30
ZAR41542	12 rung*	£559.60
ZAR41544	14 rung*	£705.21

## Falls from Height

Figures from the Health and Safety Executive show that falls from height is the most common category of fatal injury at work in the UK, with many of these involving ladders. They make up a much smaller proportion of non-fatal injuries, which we take as meaning that when things go wrong with ladders, they go really wrong.


**Please take care and follow the ladder safety tips below.**

## WERNER COMBI LADDER

### Werner Combi Ladder

NEW

Triple section aluminium ladder from Werner available in 3 sizes. Designed to be used as a stepladder, step ladder with extension, lean to extension ladder or stairway ladder. Heavy-duty wide stabiliser with slip-resistant feet for added safety during use. Approved to the latest EN131 Standard. Safe working height based on 1.75m (5ft 9in) as average persons reach height. Max. Load: 150 kg (23st 9lb)

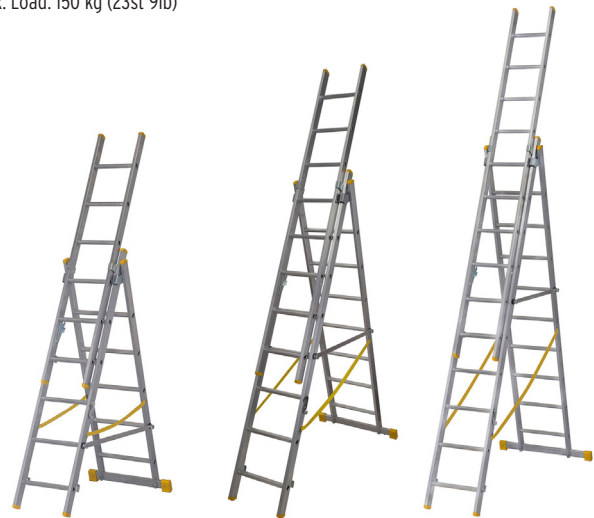

model	WR7251818	WR7252418	WR7252918
Extension Ladder	4.40m (14ft 5in)	5.76m (18ft 10in)	7.38m (24ft 2in)
Stairway Ladder	3.25m (10ft 8in)	4.04m (13ft 3in)	5.09m (16ft 8in)
Stepladder	3.25m (10ft 8in)	4.04m (13ft 3in)	5.09m (16ft 8in)
Freestanding			
Extension Ladder	3.25m (10ft 8in)	4.04m (13ft 3in)	5.09m (16ft 8in)
Weight of Ladder	12.76kg	16.26kg	21.27kg

code	description	price
WR7251818	17 rung	£271.98
WR7252418	23 rung	£312.33
WR7252918	29 rung	£410.79

## Top Ladder Safety Tips

- ✓ Daily pre-use check – feet included. Do not use damaged ladders
- ✓ Lean ladders at the correct angle: 1 out and 4 up
- ✓ Maximum permissible load: 150 kg [check with each model]
- ✓ Check restraint straps are tensioned and locking bars are in place
- ✓ Lean-to ladders must end 1 m above level of access
- ✓ On multi-part ladders use the rung lock devices
- ✓ Never erect on slippery ground
- ✓ Do not lean to the side when working from a ladder. Ensure your belt buckle [navel] stays within the stiles and keep both your feet on the same rung
- ✓ Do not lean against an unsafe bearing point
- ✓ Do not stand beyond the fifth rung from the top on multipurpose ladders or the fourth rung on lean-to ladders
- ✓ Do not climb from step ladders to a higher level of access
- ✓ Short duration work [maximum 30 minutes]
- ✓ Light work [maximum 10 kg]
- ✓ Keep three points of body contact always on the ladder
- ✓ Always secure your tools with a Lanyard [page 357]

## PLATFORM STEPS

### Werner Fibreglass Ladder

Glass fibre-reinforced plastic stiles provide effective insulation and eliminate spark risk whilst also being highly resistant to weathering. Accessories and tools can be perched on the top tray to limit trips up and down the ladder.

Approved to the latest EN131 Standard.

\*Safe working height based on 1.75m (5ft 9in) as average persons reach height.

Max. Load: 150 kg

NEW



code	description	price	model	WR7170418	WR7170618	WR7170818	WR7171018
WR7170418	4 tread	£167.18	Overall Open Ladder Height	1.54m (5ft 1in)	2.01m (6ft 7in)	2.48m (8ft 1in)	2.94m (9ft 7in)
WR7170618	6 tread	£201.90	Safe Working Height*	2.68m (8ft 9in)	3.15m (10ft 4in)	3.62m (11ft 10in)	4.08m (13ft 5in)
WR7170818	8 tread	£258.94	Ladder Weight	9.3kg	11.75kg	15.17kg	18.13kg
WR7171018	10 tread	£308.99					

### Werner Aluminium Step Ladder

Competitively priced, lightweight but sturdy step ladders from Werner.

- ✓ With high handrail for added stability whilst using the ladder.
- ✓ Slip resistant feet for added grip.
- ✓ Made from high grade aluminium

Approved to the latest EN131 standard for professional & non-professional use.

\*Safe working height based on 1.75m (5ft 9in) as average persons reach height. Max. Load: 150 kg

NEW



code	description	price	model	WR7400318L	WR7400418L	WR7400518L	WR7400618L	WR7400718L	WR7400818L
WR7400318L	3 tread	£52.54	Overall Open Ladder Height	1.21m (3ft 11in)	1.44m (4ft 9in)	1.66m (5ft 5in)	1.88m (6ft 2in)	2.10m (6ft 10in)	2.32m (7ft 7in)
WR7400418L	4 tread	£85.21	Safe Working Height*	2.35m (7ft 8in)	2.58m (8ft 5in)	2.80m (9ft 2in)	3.02m (9ft 10in)	3.24m (10ft 7in)	3.46m (11ft 4in)
WR7400518L	5 tread	£102.04	Ladder Weight	3.55kg	4.26kg	4.96kg	7.23kg	8.47kg	9.89kg
WR7400618L	6 tread	£113.04							
WR7400718L	7 tread	£125.25							
WR7400818L	8 tread	£144.21							

# ACCESS EQUIPMENT

## Zarges Anodised Trade Platform Steps

Fitted with 80 mm deep steps with a serrated surface, a 250 x 250 mm aluminium cast platform and an aluminium tool tray. Good strong practical step ladders. The working heights given are approximate. Conformity: EN 131 for 150 kg. Delivery prices: UK mainland £15.00 [3 day] £25.00 [next day].

code	weight	length	no of steps	platform height	safe working height	price
ZAR41223	3.7kg	1.41m	3	0.67m	2.7m	£183.44
ZAR41224	4.4kg	1.64m	4	0.89m	2.9m	£215.44
ZAR41225	5.1kg	1.88m	5	1.1m	3.1m	£224.59
ZAR41226	5.9kg	2.12m	6	1.33m	3.35m	£268.98
ZAR41227	7kg	2.36m	7	1.55m	3.55m	£302.94
ZAR41228	8.3kg	2.59m	8	1.77m	3.8m	£349.95
ZAR41230	10.1kg	3.07m	10	2.21m	4.2m	£404.56



## LADDER ACCESSORIES



### Ladder Platform

For comfortable working. Helps prevent fatigue over long periods.

### Bucket Hook

Slides inside the rung to leave a handy hook.

### Universal Stile Extension

Evens up the height differences on stairs and steps. Adjustment range: up to 375mm.

Fits box section stiles: 48-73mm.

### Ladder Accessories [Zarges]

code	description	price
ZAR40900	Ladder platform	£105.89
ZAR40922	Stile extension [universal]	£132.35

### Ladder Spares [Zarges]

code	description	size 1	size 2	price
ZAR824242	Stabiliser bar end stop	58mm	25mm	£17.13
ZAR824243	Stabiliser bar end stop	73mm	25mm	£20.23

### End stops for Skymaster stiles

code	size	price
ZAR824302	68mm	£13.24
ZAR824352	73mm	£13.24
ZAR824353	85mm	£13.24
ZAR824354	98mm	£16.34

## ZARGES HOP-UP WORK PLATFORM

### Zarges Hop-Up Work Platform

Although this platform is small it is fantastically useful. Place one next to you while you paint a wall to put your paint pot on while you stand and work. For the lower areas just sit on it rather than bending your back, then stand on it for the higher areas to save stretching. Take it into the yard to sit in the sun while you have your deserved cup of tea. It doesn't look very impressive but you will love it! Lightweight, but durable, made from aluminium with steel locking hinges. Compact and easy to store when closed. Standard delivery terms apply. Now available in a double width version!



code	price
ZAR100304	£79.00

## MULTIPURPOSE LADDERS

### Werner Multipurpose Ladder



Four sectioned folding ladder that can be used in up to 12 different positions using a simple click-lock hinge system. Also includes a handy slip-resistant work platform, great as a makeshift portable work bench or converts the ladder to a hop up working platform. Folds right down for compact transportation & storage. Conforms to the latest EN131 Standard

\*Safe working height based on 1.75m (5ft 9in) as average persons reach height. Max. Load: 150 kg



code	price
WR75012	£158.56

## FLEXIBLE LADDERS

### Fibreight Ladders

A black polyester webbing ladder with carbon fibre rungs providing a silent ladder suitable for occasional use. Supplied complete with bag and connector. Sometimes used for emergency mast climbing at sea.



### Flexible Ladders


These can be useful for access to front of house trusses but should never be used without back-up fall arrest equipment [see the ASAP Lock on page 358]. We suggest using the 6" wide version with 10" rung spacings which are considered the easiest to climb. The 4 mm wire ends have a tested quick link termination which enables ladders to be joined with standard rung spacing. Also available with black rungs POA.



code	length	price
LSFL05N	5m	£214.16
LSFL10N	10m	£341.66
LSFL15N	15m	£470.83
LSFL20N	20m	£595.84


code	description	length	rung spacing	price
PETLM40525	Flexible Ladder	5m	250mm	£115.50
PETLM41025	Flexible Ladder	10m	250mm	£208.34
PETLNZ06	Spare pair of Maillon Rapides			£1.38

## TALLESCOPES

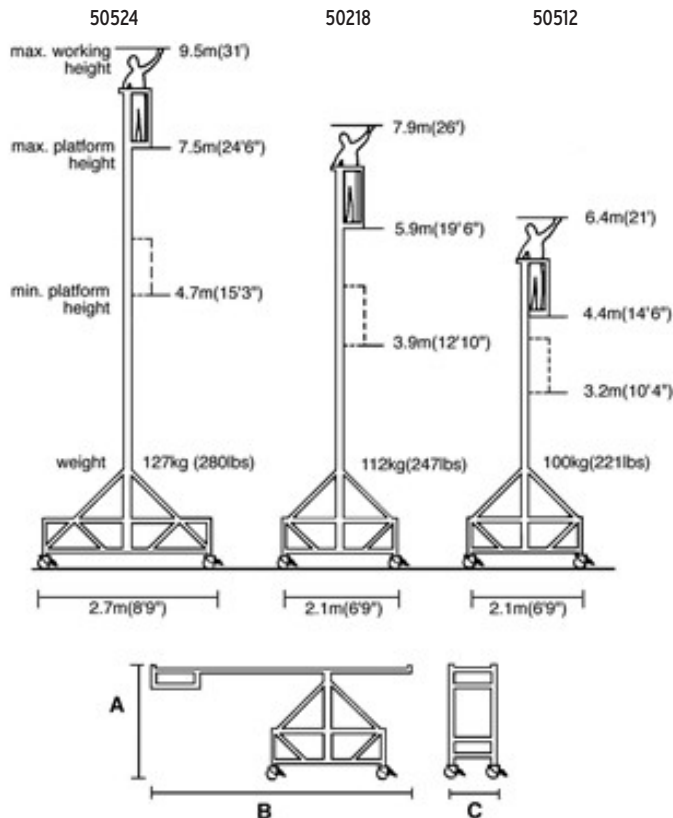

### Tallescope

For so long the standard access tool for the entertainment industry, the Tallescope gives you easy access to work on rigging, electrics, draperies, and sound etc. This compact and manoeuvrable all aluminium work platform allows access to working heights up to 9.5 m [31']. The twopart ladder section is operated by pulling a simple rope line, which allows a rung by rung height adjustment. The ladder section pivots over allowing the unit to pass through a standard doorway and for low level storage. Three standard models are available and they all are now supplied with supplementary safety kit [four outriggers etc.] as set out in the ABTT Code of Practice COP012: For the Use of Tallescopes for Working at Height in Theatres. 12 month warranty. Conformity: EN 1004  
Platform capacity: 115 kg on all models.  
Tallescope delivery: Price on application.



Tallescope	A	B	C
50512	1.9m [6'4"]	3.8m [12'6"]	0.74m [2'5"]
50518	1.9m [6'4"]	4.6m [15']	0.74m [2'5"]
50524	1.9m [6'4"]	5.3m [17'6"]	0.74m [2'5"]

Tallescope Model No	50512	50518	50524
Max working height	6.4m	7.9m	9.5m
Max platform height	4.4m	5.9m	7.5m
Min platform height	3.2m	3.9m	4.7m
Weight	100kg	112kg	127kg

code	description	price
TALL50512NFD	50512	£3,852.32
TALL50518NFD	50518	£3,883.42
TALL50524NFD	50524	£4,139.54
BKS518	Code of Practice	£15.00

## SCISSOR LIFTS

### Scissor Lifts

A useful range of small scissor lifts originally designed for lifting TV and video screens but ideally suited for product reveals and stage effects. A twin power socket can power electrical equipment up to a maximum 350 W each. The raised height can be lowered by a maximum of 160 mm using a micro switch. It is also possible to install an optional radio remote control which works at a range of 10 – 15 m. High quality German manufacturing with a two-year guarantee. NB: Please ensure the instructions are carefully followed before installing the lift. Take care to ensure shards, grit, metal filings etc. are kept clear of the worm shaft. Always lift the unit by its base frame. The standard length of cable to the rocker switch is 1.8 m. Flints holds the popular Model SLTE in stock. The other lifts will have a four week lead time.



Single Scissor		speed without weight		speed with weight		code	weight	length	width	height range	price	
code	max load	up	down	up	down	Single Scissor						
SLTA	80kg	26s	26s	33s	24s	SLTA	20kg	705mm	480mm	135-565mm	P.O.A	
SLTB	80kg	31s	30s	39s	27s	SLTB	22kg	830mm	480mm	135-665mm	P.O.A	
SLTC	120kg	38s	37s	54s	33s	SLTC	30kg	960mm	480mm	145-765mm	P.O.A	
SLTF	150kg	38s	36s	80s	42s	SLTF	36kg	960mm	510mm	150-780mm	P.O.A	
Double Scissor		speed without weight		speed with weight		Double Scissor						
code	max load	up	down	up	down	SLTD	21kg	510mm	400mm	160-660mm	P.O.A	
SLTD	80kg	17s	16s	27s	14s	SLTE	26kg	710mm	480mm	170-1070mm	P.O.A	
SLTE	80kg	27s	27s	47s	25s	Radio Controller						
											SLFIR	£89.28